



CHRISTINA[®] WATCHES

Swiss Made

USER MANUAL - MODEL 505-2



 **RONDA**
CAL. 5030.D

www.christinadesignlondon.com

USER MANUAL - MODEL 505-2

1 DISPLAY & CONTROL BUTTONS


Description of the display and control buttons

Display elements

- Date
- Second hand
- Minute hand
- Hour hand
- Centre stop-second
- Minute counter
- 1/10 second counter (hour counter after 30 minutes)

Control buttons

- Push button A
- Crown
- Push button B


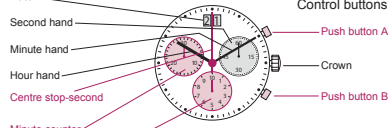


2 CHRONOGRAPH: Basic function

Chronograph: Basic function
(Start / Stop / Reset)

Example:

- ➊ **Start:** Press push-button A
- ➋ **Stop:** to stop the timing, press push-button A once more and read the three chronograph hands.
4 min / 38 sec / 7/10 sec
- ➌ **Zero positioning:** Press push-button B (The three chronograph hands will be reset to their zero positions).






3 CHRONOGRAPH: Accumulated timing

Chronograph: Accumulated timing

Example:

- ➊ **Start:** (start timing)
- ➋ **Stop:** (e.g. 15 min. 5 sec. following ➊)
- ➌ **Restart:** (timing is resumed)
- ➍ **Stop:** (e.g. 13 min. 5 sec. following ➌)
= 28 min. 10 sec.
(The accumulated measured time is shown)
- ➎ **Reset:**
The three chronograph hands are returned to their zero position






4 CHRONOGRAPH: Intermediate or interval timing

Chronograph: Intermediate or interval timing


Example:

- ➊ **Start:** (start timing)
- ➋ **Display interval:**
e.g. 10 minutes 10 seconds (timing continues in the background)
- ➌ **Marking up the measured time:**
(the three chronograph hands are quickly advanced to the ongoing measured time)
- ➍ **Stop:** (Final time is displayed)
- ➎ **Reset:** The three chronograph hands are returned to their zero position


USER MANUAL - MODEL 505-2

3 CHRONOGRAPH: Accumulated timing

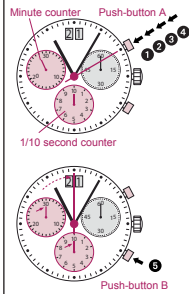


Chronograph: Accumulated timing
 Example:
 1 **Start:** (start timing)
 2 **Stop:** (e.g. 15 min. 5 sec. following 1)
 3 **Restart:** (timing is resumed)
 4 **Stop:** (e.g. 13 min. 5 sec. following 3)
 = 28 min. 10 sec.
 (The accumulated measured time is shown)
 5 **Reset:**
 The three chronograph hands are returned to their zero position

4 CHRONOGRAPH: Intermediate or interval timing

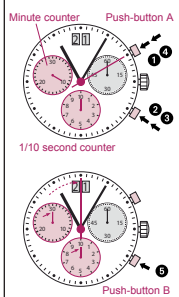

Chronograph: Intermediate or interval timing
 Example:
 1 **Start:** (start timing)
 2 **Display interval:**
 e.g. 10 minutes 10 seconds (timing continues in the background)
 3 **Marking up the measured time:**
 (the three chronograph hands are quickly advanced to the ongoing measured time)
 4 **Stop:** (Final time is displayed)
 5 **Reset:** The three chronograph hands are returned to their zero position



5 Adjusting the chronograph hands to zero position

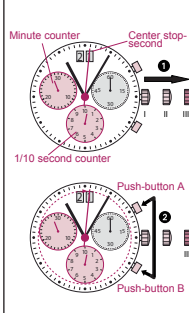


Adjusting the chronograph hands to zero position
 Example:
 One or several chronograph hands are not in their correct zero positions and have to be adjusted (e.g. following a battery change)



- 1 Pull out the crown to position III (all 3 chronograph hands are in their correct or incorrect zero position)
- 2 Keep push-buttons A and B depressed **simultaneously** for at least 2 seconds (the centre stop-second rotates by 360° → corrective mode is activated)


Adjusting the centre stop second

Single step  **1 x short**
 Continuous  **long**



Adjusting the next hand 

Adjusting the 1/10 second counter hand (position 6h)

Single step  **1 x short**
 Continuous  **long**

Adjusting the next hand 

Adjusting the minute counter hand (position 9h)

Single step  **1 x short**
 Continuous  **long**

Returning the crown to position I
 Termination of the chronograph hands adjustment (can be carried out at any time)